




# Sanyo VPC-X1200 LCD Screen Replacement

Written By: Anthony Giardina

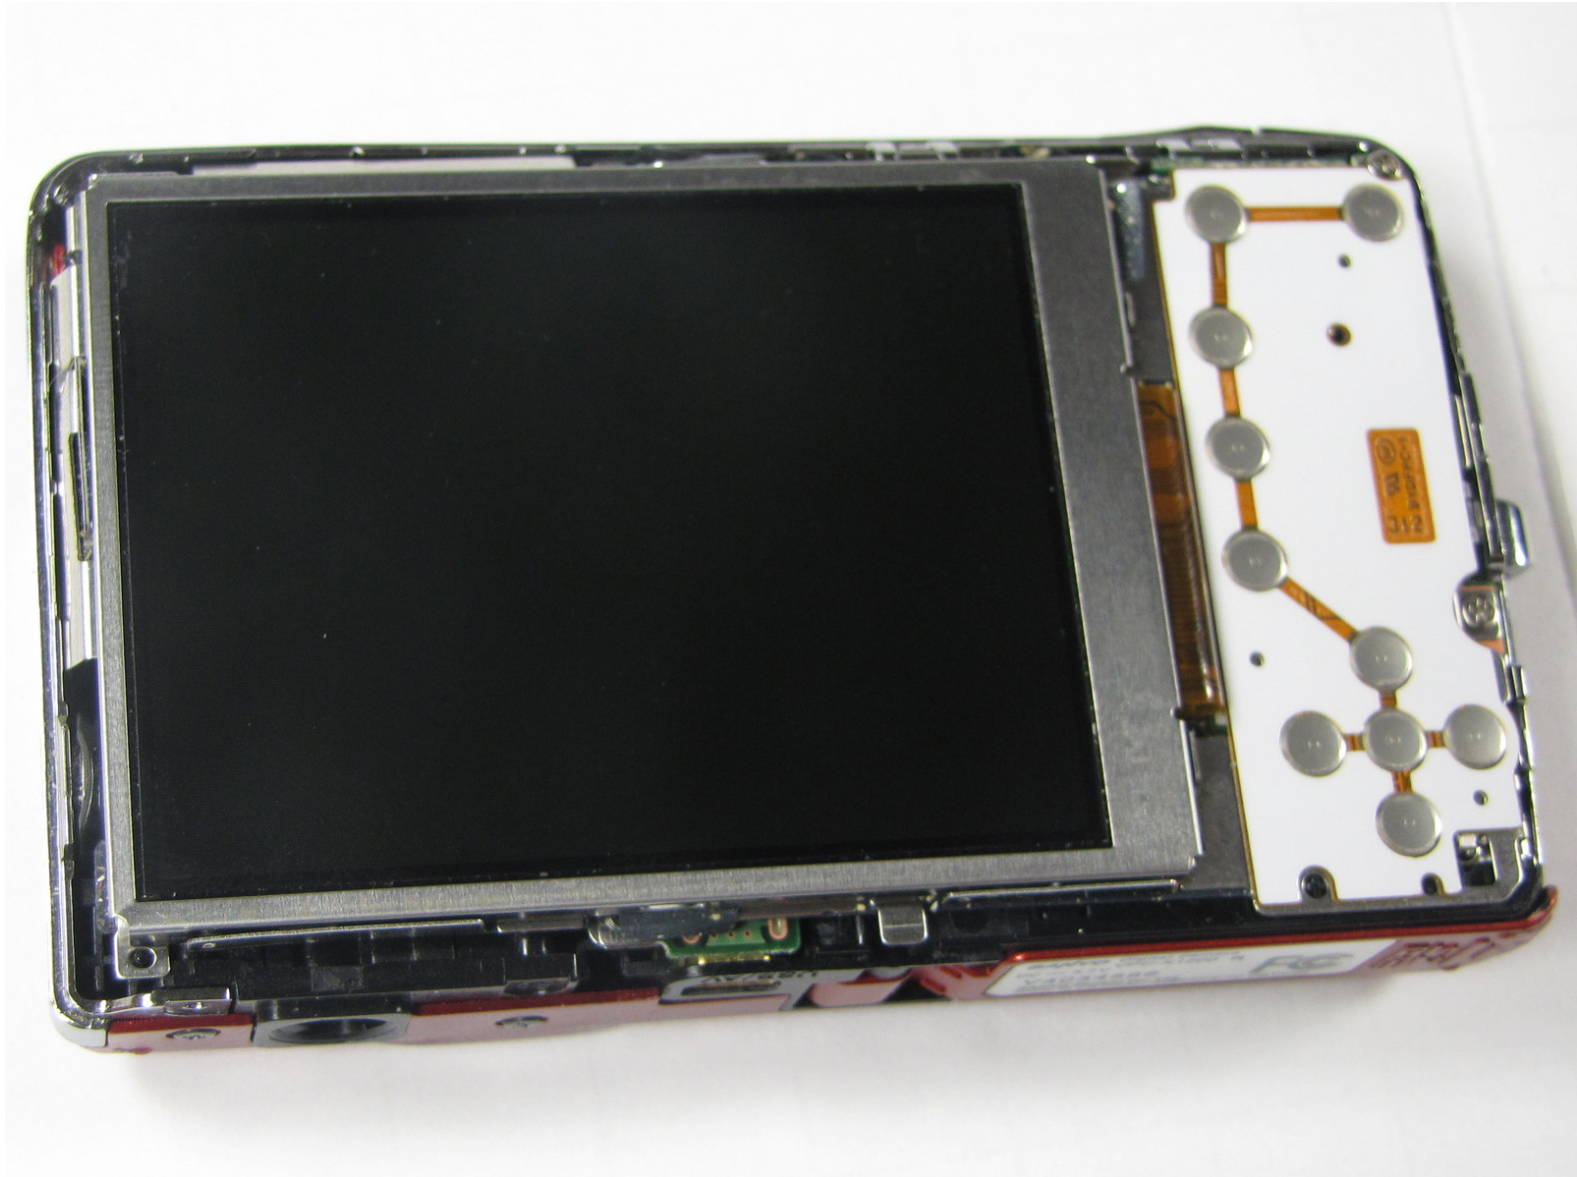

## INTRODUCTION

This guide will help you remove and replace the LCD screen.

---



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Back Case





- Remove the five case screws with a Phillips #00 Screwdriver.
- Five 3.5mm Phillips Screws

## Step 2



- Gently lift up the back cover and set aside.

## Step 3 — LCD Screen

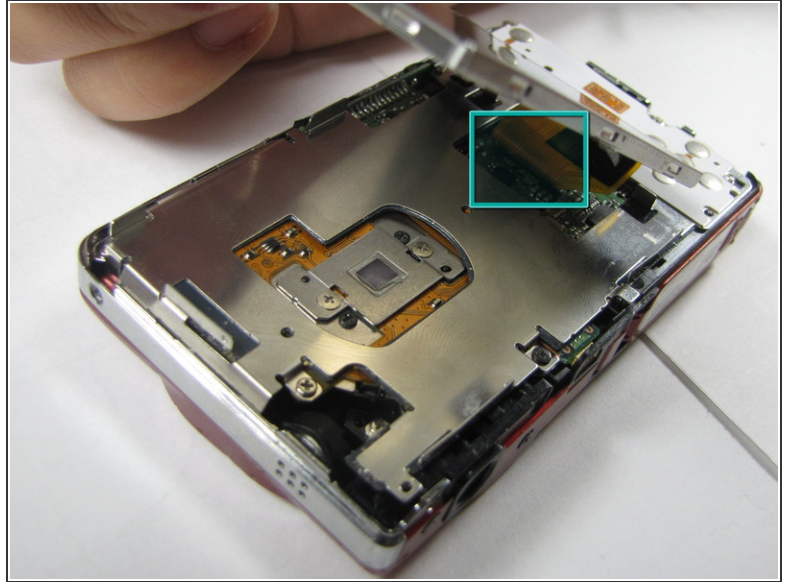
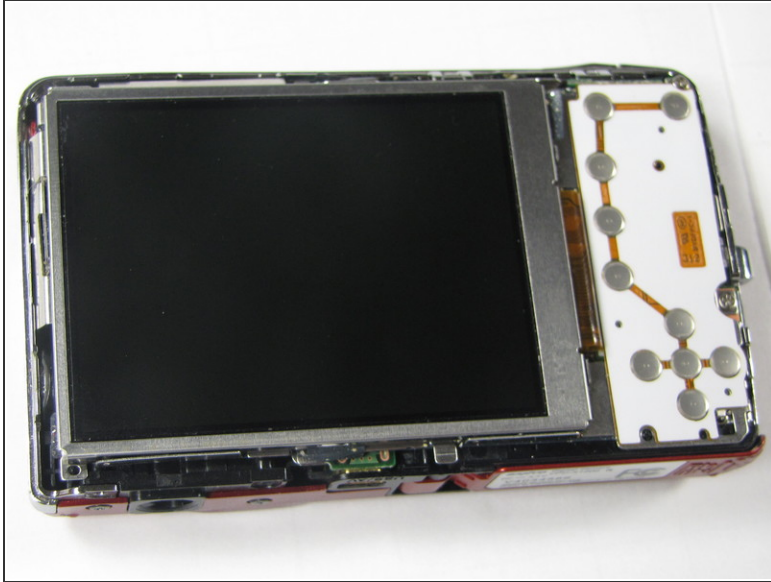


- Gently lift up on the left side of the LCD and slowly pull it to the left side of the camera but do not remove entirely, there is a ribbon connector.

⚠ Be careful not to rip out the ribbon connector.



## Step 4

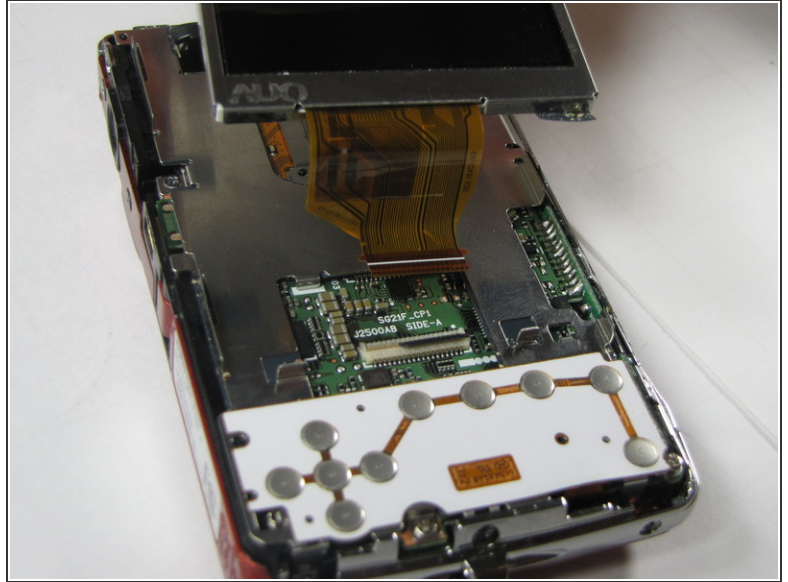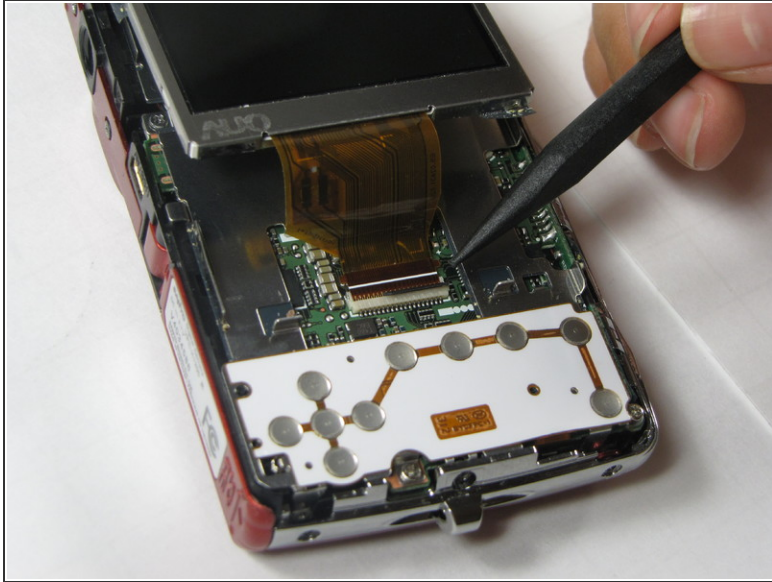

- To clear the ribbon connection underneath the screen, lift up the black ribbon gate with the spudger.
- Gently lift ribbon out of the gate and set screen aside.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-15 04:19:17 PM.